

## DATASHEET

The CueCore1 is a lighting controller for permanent installations. The device is completely solid-state, with no moving parts; it is an extremely secure and low-maintenance installation control solution that has only a minimal power consumption. All operating and programming is done through its dynamic web 2.0 interface.


The CueCore1 includes a 2-universe licence of the CueluxPro Lighting control software.




### Specifications

- 2 x DMX-512 opto-isolated Output
- 1 x DMX-512 opto-isolated Input
- MIDI Input, Through and Output
- SMPTE Timecode Input
- GPI port with 4 contact-closures
- Supports Art-Net, OSC & UDP
- Desktop or DIN Rail mounted
- Kensington lock
- Locked power cable protection
- PoE Class I


### Connection scheme

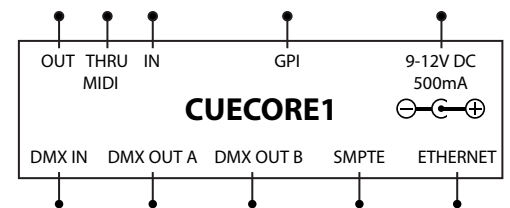



#### DMX IN



#### DMX OUT



#### GPI (RJ-45)

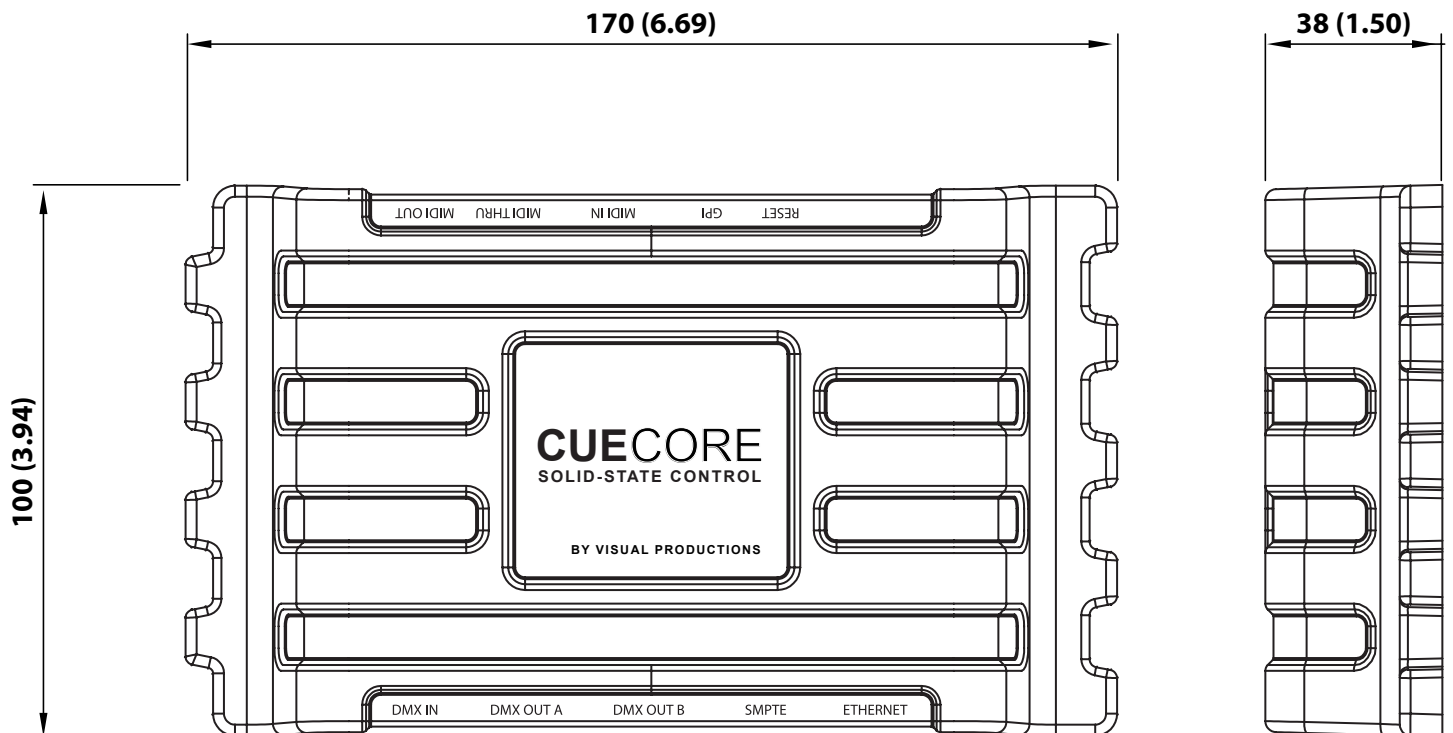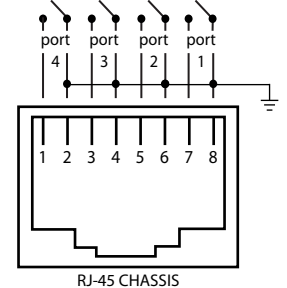

mm (inch)